



DEEP CYCLE AGM TECHNOLOGY

LDC6-400-L16 BCI GROUP 903

FEATURES & BENEFITS

- True deep cycle AGM technology-GREEN SOLUTION
- Over 99.99% virgin lead for grid plate and active material
- Heavy duty grid/paste design for deep cycle application
- Maintenance free, non-spillable, valve-regulated
- Double separator configuration: long cycle life & High energy density and super anti-vibration design
- Low self-discharge for longer shelf life



ELECTRICAL SPECIFICATIONS

Voltage (V)	Capacity (AH)					Reserve Capacity (Min)		
	100HR	20HR	10HR	5HR	3HR	@25A	@56A	@75A
6	435	400	375	342	320	925	/	265

PHYSICAL SPECIFICATIONS


Model	Dimensions (mm/inches)				Weight (kg/lbs)	Terminal Type (Standard)	Case Material
	Length	Width	Height	Total Height			
LDC6-400-L16	295 (11.61)	180 (7.09)	406 (15.98)	428 (16.85)	54.2 (119.5)	DT-5/16	PP

Operating Temperature Range		
Discharge	Charge	Storage
-15°C ~ 50°C (5°F ~ 122°F)	0°C ~ 40°C (32°F ~ 104°F)	-15°C ~ 40°C (5°F ~ 104°F)

DEEP CYCLE AGM BATTERY

LDC6-400-L16


DIMENSIONS

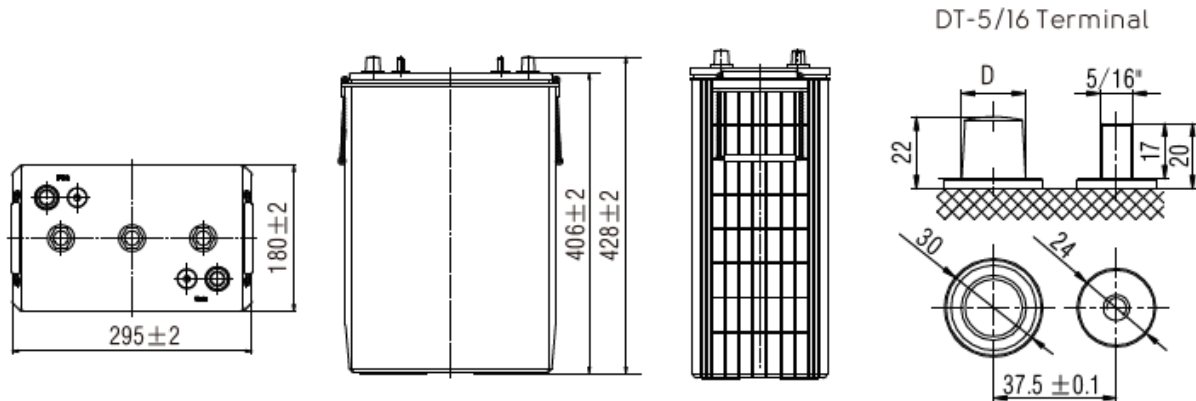


Note: D: Positive 19.5⁰_{-0.3}, D: Negative 17.9⁰_{-0.3}; Terminal Torque Values in-lb(Nm) :176-203(20-23)

PERFORMANCE CHARACTERISTICS


LEOCH LDCAGM Charging Profile

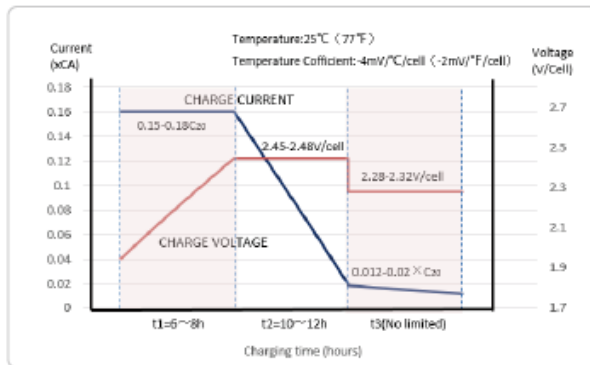


Relationship of OCV and State Of Charge (25°C, 77°F)

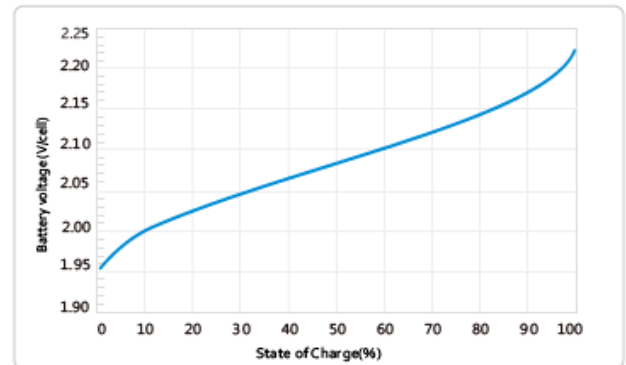

Cycle life in relation to Depth Of Discharge

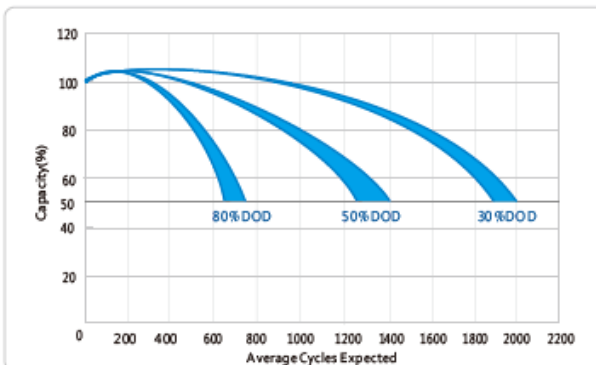

Self-discharge Characteristic

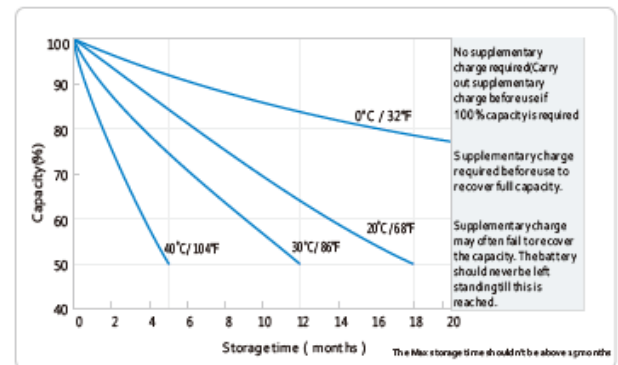

DEEP CYCLE AGM BATTERY